



Prese za završne čaure 2



Alat za rezanje i guljenje 3



Automatski alat za rezanje i guljenje 4



Alat za rezanje, guljenje i presovanje za komunikacionih tehnologija 4



Univerzalna presa za izolovane i neizolovane jednostruke i dvojne završne čaure 5



Univerzalna presa za izolovane kablovske papučiće i stopice 6



Univerzalna presa za neizolovane kablovske papučiće i stopice 6



Univerzalna presa za neizolovane kablovske papučiće i stopice 7



Univerzalna presa za neizolovane kablovske natične papučiće i stopice 7



Hidraulična presa na ručni pogon 8



Hidraulična presa sa akumulatorom 9



Punjač za akumulator 9



Akumulator 9



Hidraulična navlačna presa i izbijač 10




Sekač za bakarne i aluminijumske kablove sa transmisijom 11




Alat za rezanje bakarnih i aluminijumskih kablova 12



Izolovana klješta sa naponom izolacije do 1000 V 12



Odvrtac (šrafciğer) za napon 1000 V, kombiprofil 13



Izolovana garnitura odvrtaca sa naponom izolacije do 1000V 13



Ručni alat za zatezanje i rezanje vezica 14



Žila za uvlačenje 14



Generator toplog vazduha 15



Garnitura klješta za precizne mehaničare 15




Nož sa dve oštrice za guljenje provodnika 15



Alat za guljenje kablova 15

Piktogrami zaglavlja tabela

	Masa		Temperatura sredine		Tip glave odvrtča (šrafcižera)		Dužina alata
	Maksimalni presek sečenja		Maksimalni prečnik sečenja		Oblast presovanja		Maksimalni poprečni presek provodnika
	Dužina hoda cilindra		Kapacitet izbijanja		Maksimalna sila presovanja		Zakretna glava u 360°
	Snaga akumulatora (Ah)		Napon akumulatora (V)		Tip Akumulatora		Stezna sila sa podešavanjem
	Širina sečenja		Napomena dopuna		Nazivni napon (V)		Nazivna snaga

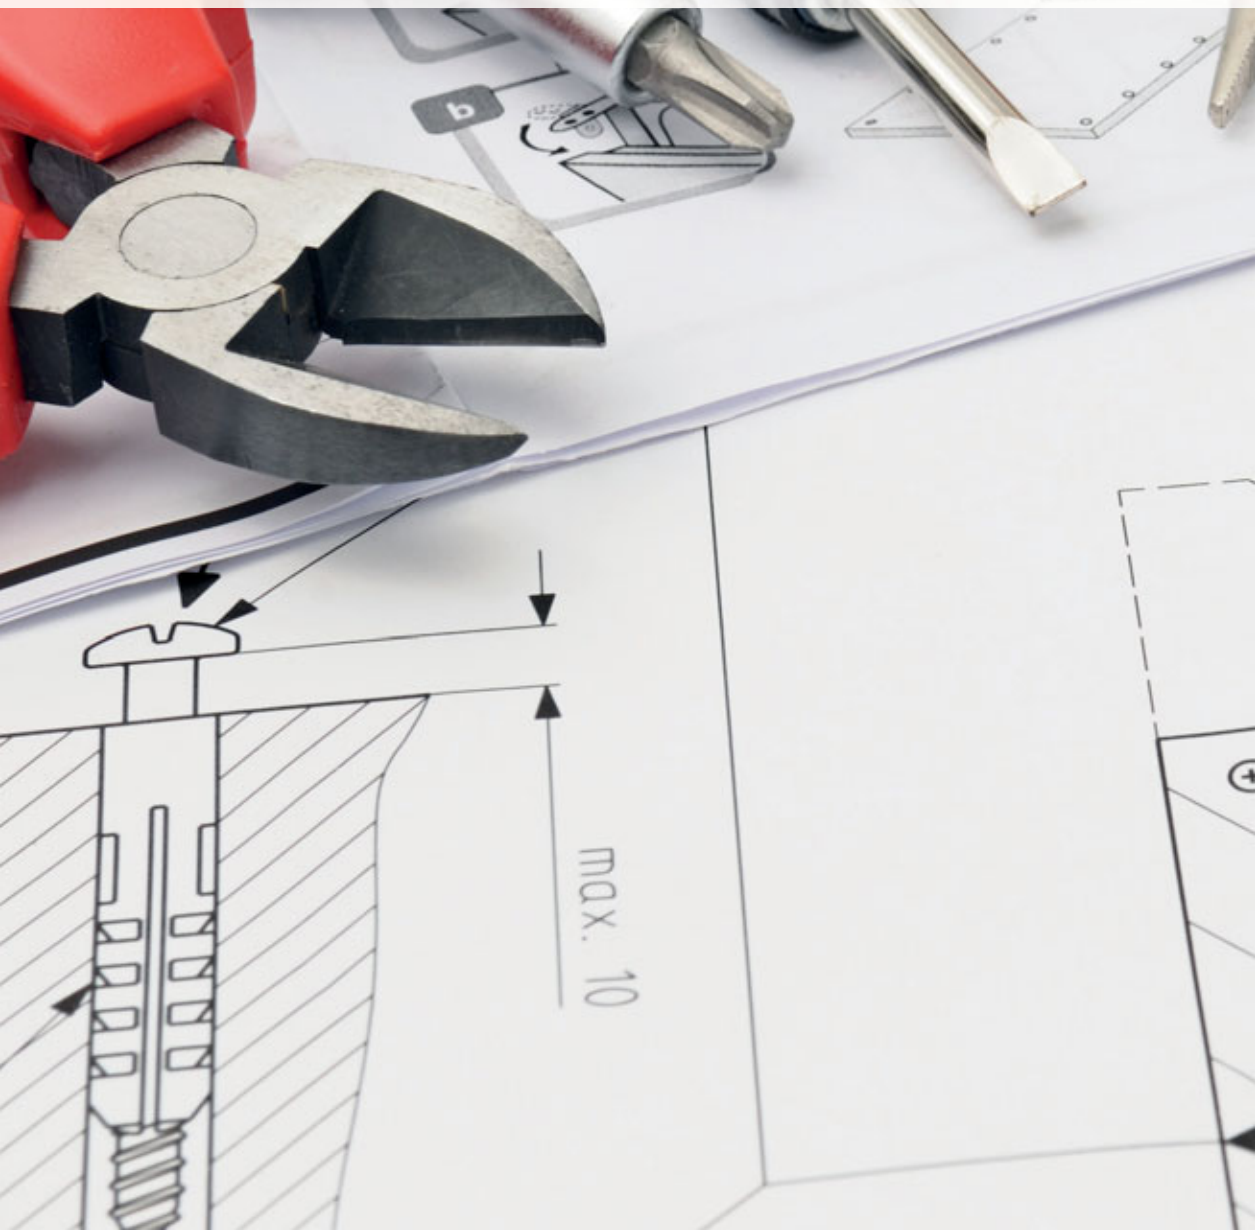

Prese za završne čaure

TRACON	 mm²		
F6L	0,5-6	205 mm	470 g
F25L	6-25	240 mm	620 g
F50L	35-50	240 mm	620 g




F6L



F25L



F50L

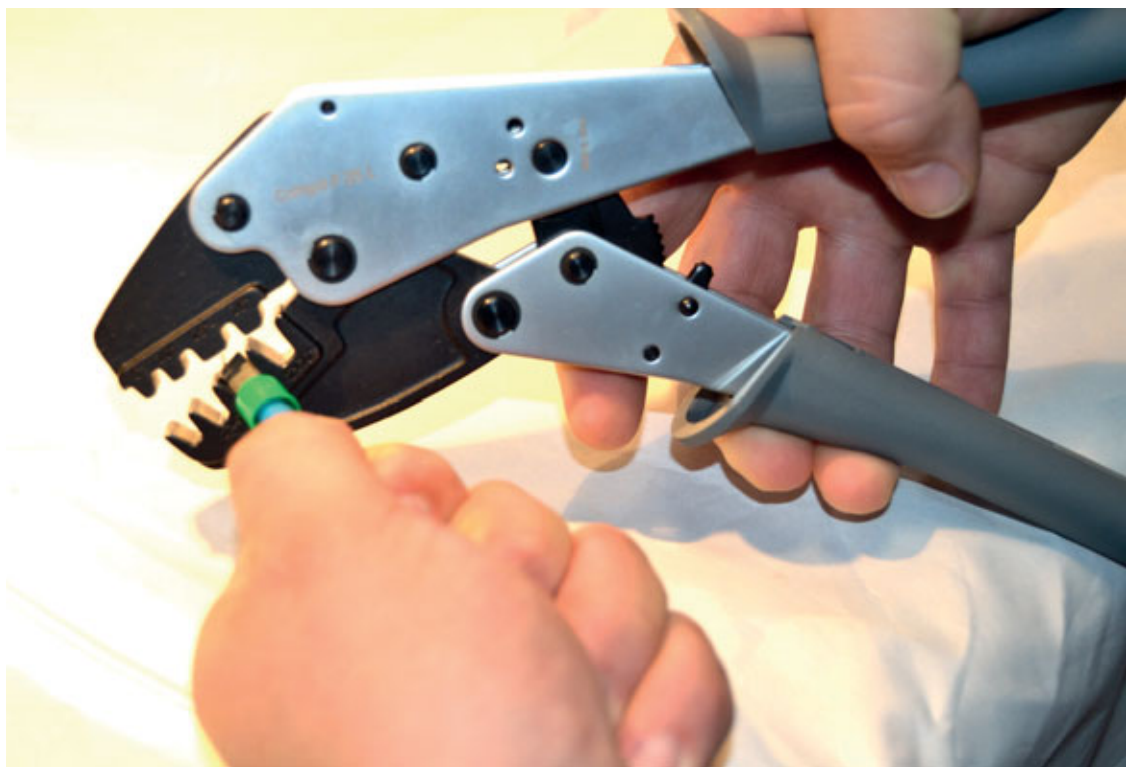

Alat za rezanje i guljenje

TRACON	 mm ²		
MACS6	0,08-6	205 mm	180 g
MACS16	6-16	205 mm	180 g



Garnitura alata za presovanje za priključnice SOLAR11-4AB i SOLAR11-4N

TRACON	 mm ²		
SOLAR11-PT	2.5-6	270 mm	725 g / 1710 g



Učitajte šifru!

- Pogledajte naše novosti
- Budite savremeni

Naš asortiman se brzo i kontinuirano proširuje!
Katalog predstavlja stanje od aprila 2019.
Za sveže informacije, posetite naš sajt!

Automatski alat za rezanje i guljenje

TRACON	 mm ²		
TKCS	0,1-4 (6)	200 mm	175 g
TP700A	0,25-2,5	180 mm	380 g
TP700B	0,75-6	180 mm	380 g
LY731	0,5-6	200 mm	300 g



TKCS



TP700A



TP700B



LY731

Alat za rezanje, guljenje i presovanje za komunikacionih tehnologija

TRACON			
RJ86	220 mm	310 g	RJ11, RJ12, RJ45
RJ468	220 mm	200 g	RJ11, RJ12, RJ45, RJ50
RG317	230 mm	200 g	BNC, TNC, RG 1,72 / 2,6 / 5,4 / 6,5 / 8,1 mm



RJ86



RJ468



RG317



Učitajte šifru!

- Pogledajte naše novosti
- Budite savremeni

Naš asortiman se brzo i kontinuirano proširuje!
Katalog predstavlja stanje od aprila 2019.
Za sveže informacije, posetite naš sajt!

Univerzalna presa za izolovane i neizolovane jednostruke i dvojne završne čaure

TRACON			
9039	6-16	230 mm	600 g
9102-LT	0,25-2,5	145 mm	160 g
9004-LT	0,5-16	180 mm	320 g
9039A-SPEC	0,25-6	175 mm	400 g
9039B-SPEC	6-16	210 mm	470 g
9039-HEXA	0,25-6	175 mm	400 g
9039A	1,5-6	230 mm	600 g
9039AR	0,5-6	230 mm	600 g
9039BR	10-35	230 mm	600 g
9039B	10-35	230 mm	600 g

Objašnjenje
piktograma

B/O



Univerzalna presa za izolovane kablovske papučice i stopice

TRACON	 mm ²		 m
LY35C	10-35	490 mm	2.150 g
9006RS	0,5-2,5	230 mm	600 g
9006R	2,5-6	230 mm	600 g
9006	2,5-6	230 mm	600 g



Univerzalna presa za neizolovane kablovske papučice i stopice

TRACON	 mm ²		 m
HD156R	1,5-6	225 mm	540 g
HD156	1,5-6	247 mm	540 g
KH8	1,5-10	280 mm	470 g
KH14	6-16	280 mm	470 g
KH16	1,5-16	280 mm	470 g



Univerzalna presa za neizolovane kablovske papučice i stopice

TRACON	 mm ²		
KH120	10-95	645 mm	3.000 g
HX50B*	6-50	390 mm	1.300 g
HX120B*	10-120	630 mm	4.000 g
HX150B*	25-150	650 mm	3.200 g

* Opseg presovanja zavisi od tipa i dimenzija primenjenih papučica ili čaura, videti poglavlje „A „!



**HX50B
HX120B
HX150B**

HX50B-FEJ
Markica za presovanje i gnječenje u prese za neizolovane kablovske papučice i stopice tipa HX50B
Za bakarne i aluminijumske papučice, stopice

HX120B-FEJ
Markica za presovanje i gnječenje u prese za neizolovane kablovske papučice i stopice tipa HX120B
Za bakarne i aluminijumske papučice, stopice

HX150B-FEJ
Markica za presovanje i gnječenje u prese za neizolovane kablovske papučice i stopice tipa HX150B
Za bakarne i aluminijumske papučice, stopice




Univerzalna presa za neizolovane kablovske natične papučice i stopice

TRACON	 mm ²		
LY03BR	0,5-6	230 mm	600 g
LY03B	0,5-6	230 mm	600 g



Objašnjenje
piktograma

B/O

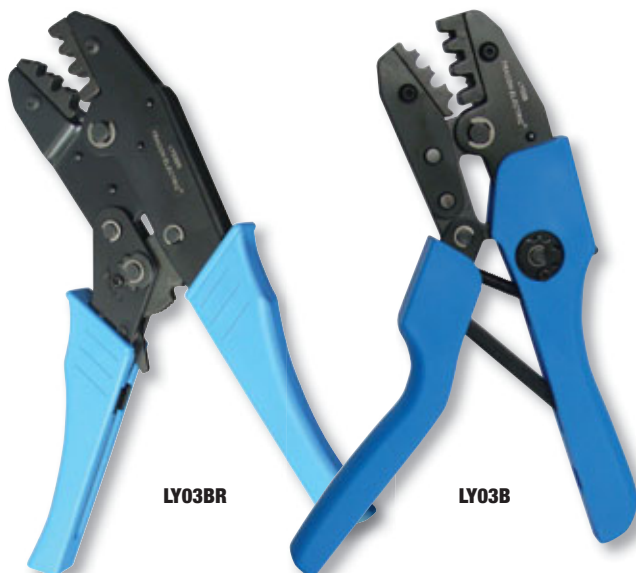

LY03BR

LY03B

Hidraulična presa na ručni pogon

TRACON	 mm ²	 kN max			 m
D31*	4-95	35	360°	200 mm	1.550 g
D51*	10-185	55	180°	365 mm	2.500 g
D52F*	10-240	67	180°	375 mm	2.800 g
C120F*	16-400	120	180°	590 mm	7.000 g
KHP70**	4-70	50	—	375 mm	3.000 g
KHP240**	16-240	120	—	480 mm	6.250 g

*Pribor: plastična transportna torba

**Pribor: plastična transportna torba+markice



Markice za prese D31

TRACON		Cu  mm ²	Al  mm ²
D31-4	KZ 4	4	-
D31-6	KZ 5	6	4
D31-10	KZ 6	10	6
D31-16	KZ 8	16	10
D31-25	KZ 10	25	16
D31-35	KZ 12	35	25
D31-50	KZ 14	50	35
D31-70	KZ 16	70	50
D31-95	KZ 18	95	70



Markice za presovanje (šestougaone) D52F

TRACON	Cu  mm ²	Al  mm ²
D52F-1016	10-16	10
D52F-2535	25-35	16-25
D52F-5070	50-70	50-35
D52F-95120	95-120	70-95
D52F-150	150	120
D52F-185	185	150
D52F-240	240	185



Markice za presovanje (šestougaone) C120F

TRACON	Cu  mm ²	Al  mm ²
C120F-16	16	-
C120F-25	25	16
C120F-35	35	25
C120F-50	50	35
C120F-70	70	50
C120F-95	95	70
C120F-120	120	95
C120F-150	150	120
C120F-185	185	150
C120F-240	240	185
C120F-300	300	240
C120F-400	400	300



Markice za prese D51

TRACON		Cu  mm ²	Al  mm ²
D51-10-120	KZ 6	10	6
	KZ 20	120	95
D51-16-70	KZ 8	16	10
	KZ 16	70	50
D51-25-95	KZ 10	25	16
	KZ 18	95	70
D51-35-50	KZ 12	35	25
	KZ 14	50	35
D51-150	KZ 22	150	120
D51-185	KZ 25	185	150



Hidraulična presa sa akumulatorom

TRACON	 mm ²	 kN max			
D31E	4-95	35	360°	200 mm	1.550 g
D55E	10-185	55	340°	315 mm	3.250 g
D62E	6-240	62	340°	320 mm	3.550 g

Pribor:

- punjač za akumulatore, AKKUT1
- Akumulator, AKKU1
- metalna transportna torba

Markice za prese D62E

TRACON		Cu mm ²	Al mm ²
D62-10	KZ 6	10	6
D62-16	KZ 8	16	10
D62-25	KZ 10	25	16
D62-35	KZ 12	35	25
D62-50	KZ 14	50	35
D62-70	KZ 16	70	50
D62-95	KZ 18	95	70
D62-120	KZ 20	120	95
D62-150	KZ 22	150	120
D62-185	KZ 25	185	150
D62-240	KZ 28	240	185
D62-300	KZ 32	300	240

Markice za prese D31E

TRACON		Cu mm ²	Al mm ²
D31-4	KZ 4	4	-
D31-6	KZ 5	6	4
D31-10	KZ 6	10	6
D31-16	KZ 8	16	10
D31-25	KZ 10	25	16
D31-35	KZ 12	35	25
D31-50	KZ 14	50	35
D31-70	KZ 16	70	50
D31-95	KZ 18	95	70

Punjač za akumulatore

TRACON				
AKKUT1	230 V AC	18 V	2100 mAh	Li-ion



Objašnjenje
piktograma

B/O



Markice za prese D55E

TRACON		Cu mm ²	Al mm ²
D51-10-120	KZ 6	10	6
	KZ 20	120	95
D51-16-70	KZ 8	16	10
	KZ 16	70	50
D51-25-95	KZ 10	25	16
	KZ 18	95	70
D51-35-50	KZ 12	35	25
	KZ 14	50	35
D51-150	KZ 22	150	120
D51-185	KZ 25	185	150



Akumulator

TRACON			
AKKU1	18 V	2000 mAh	Li-ion



Hidraulična navlačna presa i izbijач HKS-15



TRACON	 kN max	 I_{max}	 a	 m
HKS-15	150 kN	max. 2-3 mm	25 mm	6.2 kg

Pribor prese: • Matrice za presovanje Ø21,8mm; Ø27,6mm; Ø34,1mm; Ø42,7mm; Ø48,7mm; Ø60,5mm; □32×32mm • Transportna torba

Upotrebljavaju se za komponovanje metalnih ormara. Pomoću ovog alata sa lakoćom se pravi kompozicija ili opremanje ormara signalnim svetilkama, tasterima, ručnim prekidačima, odnosno zaptivnim uvodnicama kablova.



Objašnjenje
piktograma

B/O

Pribor za naručiti



TRACON		 I_{max}
HKS-15-20	Zaptivni uvodnik MG20	Ø20 mm
HKS-15-22	Ø22 mm dugmad	Ø22 mm
HKS-15-25	Zaptivni uvodnik MG25	Ø25 mm
HKS-15-32	Zaptivni uvodnik MG32	Ø32 mm
HKS-15-40	Zaptivni uvodnik MG40	Ø40 mm
HKS-15-50	Zaptivni uvodnik MG50	Ø50 mm
HKS-15-63	Zaptivni uvodnik MG63	Ø63 mm
HKS-15-PG13,5	Zaptivni uvodnik PG13,5	Ø20 mm
HKS-15-PG16	Zaptivni uvodnik PG16	Ø23,5 mm
HKS-15-PG21	Zaptivni uvodnik PG21	Ø29,5 mm
HKS-15-PG29	Zaptivni uvodnik PG29	Ø36 mm
HKS-15-PG36	Zaptivni uvodnik PG36	Ø46 mm
HKS-15-PG42	Zaptivni uvodnik PG42	Ø51 mm
HKS-15-PG48	Zaptivni uvodnik PG48	Ø59 mm
HKS-15-43×43	Instrument okvira 48×48 mm	□43×43 mm
HKS-15-68×68	Instrument okvira 72×72 mm	□68×68 mm
HKS-15-92×92	Instrument okvira 96×96 mm	□92×92 mm
HKS-15-BSZ10	osovina za uvlačenje, 105 mm	max. 2-3 mm



Sekač za bakarne i aluminijumske kablove sa transmisijom

TRACON	d _{max} 	NYN  mm ²	NYN  mm ²	NYCWY  mm ²	NAYY  mm ²	NAYY  mm ²	AYCWY  mm ²
RKV300	35 mm	max. 4×50	max. 1×240	max. 4×50/25	max. 4×70	max. 1×300	max. 4×50/25
RKV700	60 mm	max. 4×95	max. 1×240	max. 4×95/50	max. 4×120	max. 1×300	max. 4×95/35
RKV1000	95 mm	–	–	max. 4×240/120	max. 4×240	max. 1×500	–




RKV300



RKV700



Drška sa teleskopom

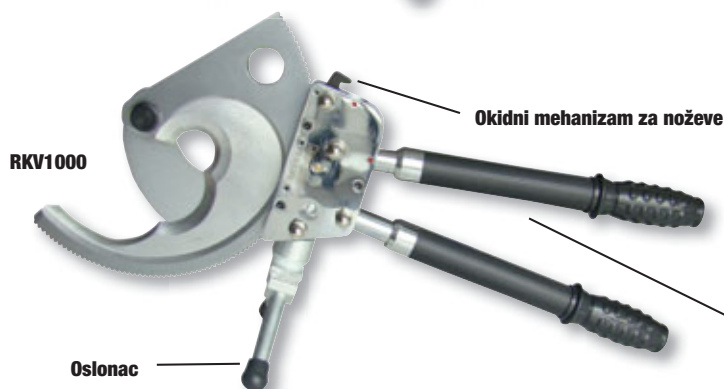

RKV1000

Okidni mehanizam za noževe

Oslonac



Drška sa teleskopom



Alat za rezanje bakarnih i aluminijumskih kablova

TRACON	A _{max} 	d _{max} 		
CC22	16 mm ²	5,5 mm	150 mm	190 g
CC38	25 mm ²	6,5 mm	210 mm	350 g
CC60	35 mm ²	8 mm	230 mm	510 g
CC80	70 mm ²	9 mm	235 mm	510 g
CC100	100 mm ²	15 mm	320 mm	500 g
CC250	250 mm ²	17 mm	600 mm	1250 g
CC500	500 mm ²	25 mm	800 mm	2850 g




Izolovana klješta sa naponom izolacije do 1000 V

TRACON			
KF-1000	160 mm	230 g	kombinovana klješta
KF-1000-2	200 mm	370 g	kombinovana klješta
KB-1000	160 mm	230 g	klješta za guljenje
KC-1000	160 mm	210 g	dijagolana klješta
KL-1000	160 mm	230 g	ravna klješta



RELEVANT STANDARD
EN 60900

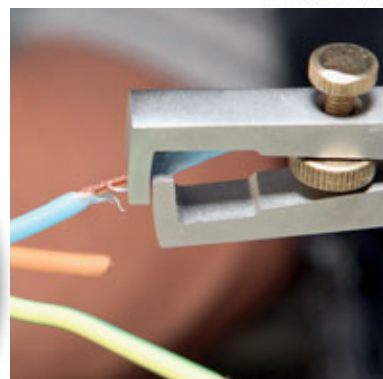

Odvrtać (šrafciğer) za napon 1000 V, SD

TRACON		
SD375F	3×75 mm	
SD4100F	4×100 mm	
SD5125F	5×125 mm	
SD6100F	6×100 mm	
SD6125F	6×125 mm	
SD6150F	6×150 mm	
SD375S	3×75 mm (PH0)	
SD4100S	4×100 mm	
SD5125S	5×125 mm (PH1)	
SD6100S	6×100 mm (PH2)	
SD6125S	6×125 mm (PH2)	
SD6150S	6×150 mm (PH2)	



RELEVANT STANDARD
EN 60900



Odvrtać (šrafciğer) za napon 1000 V, kombiprofil

TRACON		
SDDK4100S	4×100 mm	
SDDK5125S	5×125 mm (PZ1)	
SDDK6150S	6×150 mm (PZ2)	

Odvrtaći tipa SDDK imaju specijalnu izvedbu glave, koja je pogodna za stezanje specijalno izvedenih zavrtnji primenjenih u brojilima, automatskim osiguračima/ prekidačima kontaktorima u Tracon-ovim ponudama. Ovi zavrtnji su sa zvezdastim žlebovima, koji se mogu zatezati i pljosnatim odvrtaćima. Kombi-profil ujedinjava prednosti odvrtaća pljosnatih i sa unakrsnim žlebovima, a stime pomaže lakše i pouzdanije zatezanje.



VDE TEST REPORT NO.:
40011797



RELEVANT STANDARD
EN 60900



Izolovana garnitura odvrtaća sa naponom izolacije do 1000V

TRACON			
KSET1000	1.0 × 5.5 × 125 mm	PH2 × 100 mm	
	0.8 × 4.0 × 100 mm	PH1 × 80 mm	
	0.4 × 2.5 × 75 mm	PH0 × 60 mm	



Ručni alat za zatezanje i rezanje vezica

TRACON		
TG007	2.2-8 mm	220 g
TG008	2.2-4.8 mm	320 g
TG010	3.6-13 mm	380 g




TG008



TG007



TG010

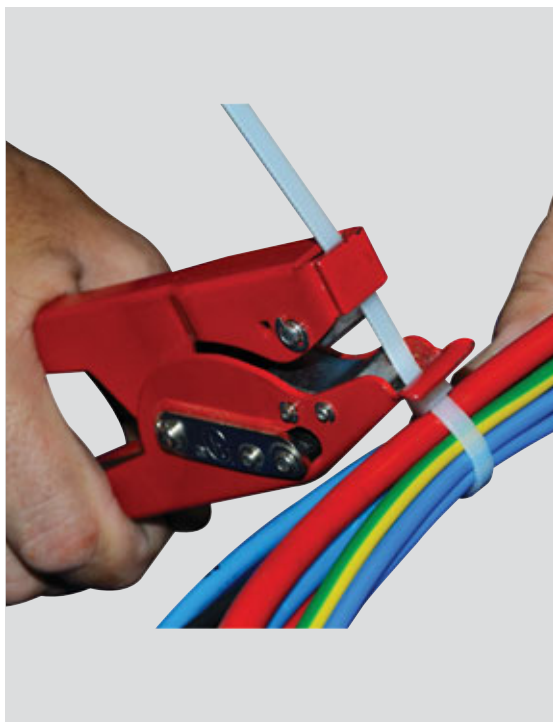

Žila za uvlačenje

TRACON			
TBSZ-5	5 m		
TBSZ-10	10 m	$\varnothing = 3 \text{ mm}$	Plastična žila za uvlačenje sa metalnom glavom i omčetom
TBSZ-20	20 m		
TBSZS-5	5 m		
TBSZS-10	10 m	$\varnothing = 3.2 \text{ mm}$	Metalna spiralna žila za uvlačenje
TBSZS-20	20 m		
TBSZF-5	5 m		
TBSZF-10	10 m	$d = 3.2 \text{ mm}$	Metalna trakasta žila za uvlačenje
TBSZF-20	20 m		



Generator toplotog vazduha

TRACON	U_n				
HLF-02	230 V AC	1.000/2.000 W	350/600 °C	1450 g	300 / 500 l/min

Garnitura klješta za precizne mehaničare

TRACON			Objašnjenje piktograma	B/O
SP-KLT				

Sadržaj:

- 1 kom klješta sa čeonim secivom
- 1 kom klješta sa bočnim secivom
- 1 kom klješta kupastim kljunima i
- 1 kom kombinirka.

Nož sa dve oštrice za guljenje provodnika

TRACON				
KB-UNI	160 mm	70 g		

Alat za guljenje kablova

TRACON		max. $\varnothing$			
KBY	200 mm	12 mm	95 g		



Učitajte šifru!

- Pogledajte naše novosti
- Budite savremeni

Naš asortiman se brzo i kontinuirano proširuje!
 Katalog predstavlja stanje od aprila 2019.
 Za sveže informacije, posetite naš sajt!